


CINEPLEX NOIR ACTIVELY CANCELING NOISE



Engineered to Absorb the Unwanted.

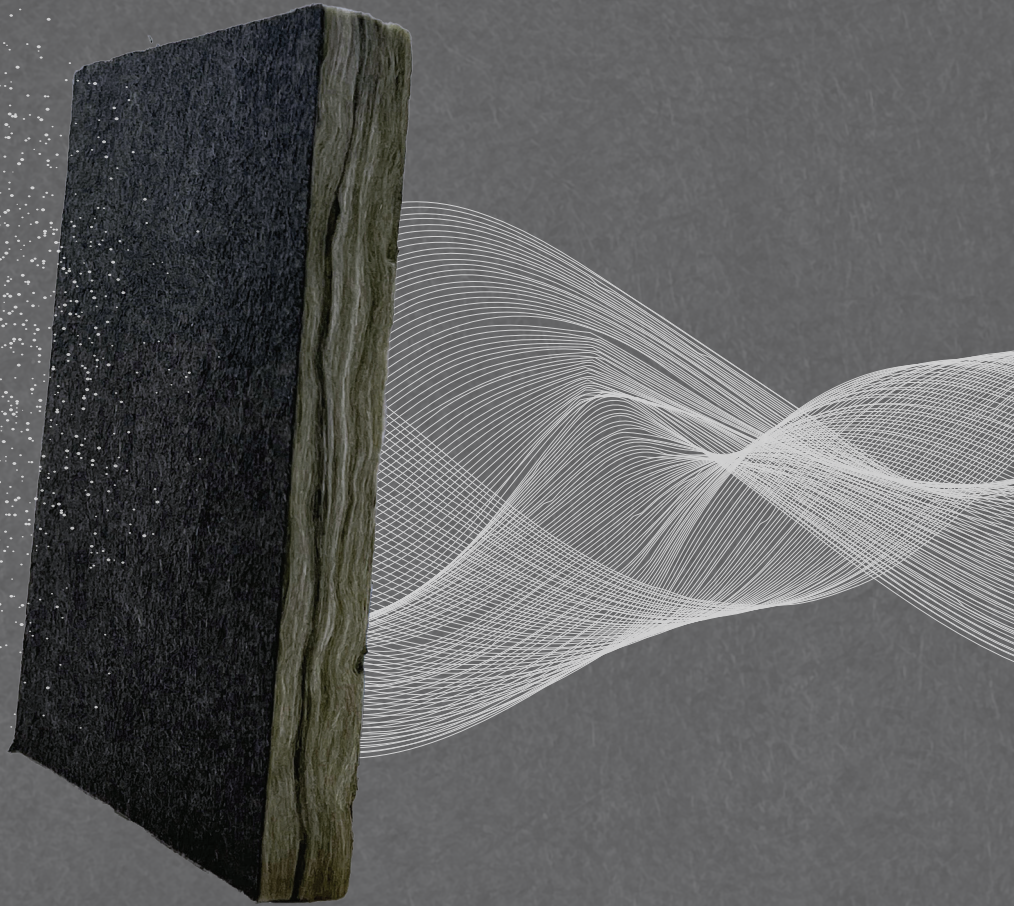

SOUND INSULATION &
ABSORPTION



THERMAL
COMFORT



ENVIRONMENTALLY
FRIENDLY
RECYCLED GLASS



UNIQUE
LIGHTNESS

MADE
IN SA

Cineplex Noir

Cineplex Noir ceiling tiles are manufactured from **non-combustible Glasswool**. Each tile is finished with a **sleek black non-woven glass tissue**, delivering **exceptional sound absorption** and a premium design aesthetic.

Originally developed for **cinemas and auditoriums** where high acoustic performance is essential, Cineplex Noir is equally effective in **conference rooms, entrance halls, and community areas, such as places of worship, school halls etc** where optimal sound absorption and clarity are required.

Quality Management System

Manufactured to the highest international standards:

- ISO 9001:2015 (Quality Management)
- ISO 14001:2015 (Environmental Sustainability)

Environmental Sustainability

Cineplex Noir is designed with environmental responsibility in mind:

- Manufactured with **recycled glass**
- **Zero Ozone Depleting Potential (ODP)**
- **Zero Global Warming Potential (GWP)**
- Less material, less energy, fewer emissions

Fire Properties

Non-combustible (tested to **SANS 10177 Part 5**)

Thermal Properties

Contributes to **indoor comfort and energy efficiency** by reducing heat loss and gain through inherent insulation performance.

Durability

- Odourless and inert
- Compatible with all standard building materials
- Resistant to mould, fungi, and bacteria
- Non-hygroscopic (does not absorb moisture)
- Dust settlement does not impact performance

Features & Benefits

- ✓ Lightweight and easy to handle
- ✓ Exceptional acoustic absorption
- ✓ Class A absorption performance
- ✓ Thermal resistance for comfort and energy savings
- ✓ Non-combustible for fire safety
- ✓ Will not sag when correctly installed
- ✓ Durable, inert, and non-hygroscopic

Applications




Cinemas & auditoriums



Concert halls & performance venues



Entrance halls, lobbies & conference rooms

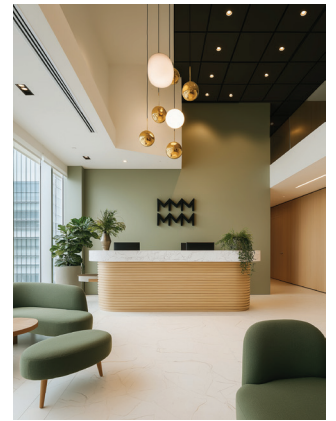

Any building where clarity and comfort matter

Acoustic Properties


Cineplex Noir	Acoustic Class	NRC (up to)	α_w value
40 mm	A	0.85	0.95
25 mm	A	0.85	0.90

Proven to:

- Reduce echoes and reverb
- Minimise sound transmission between spaces
- Enhance clarity for speech, music, and performance

Available Versions

Material code	Size (mm)	Thickness (mm)	Density (kg/m ³)
32424	595 x 595	40	40
31526	1195 x 595	40	40
32446	595 x 595	25	60
32447	1195 x 595	25	60

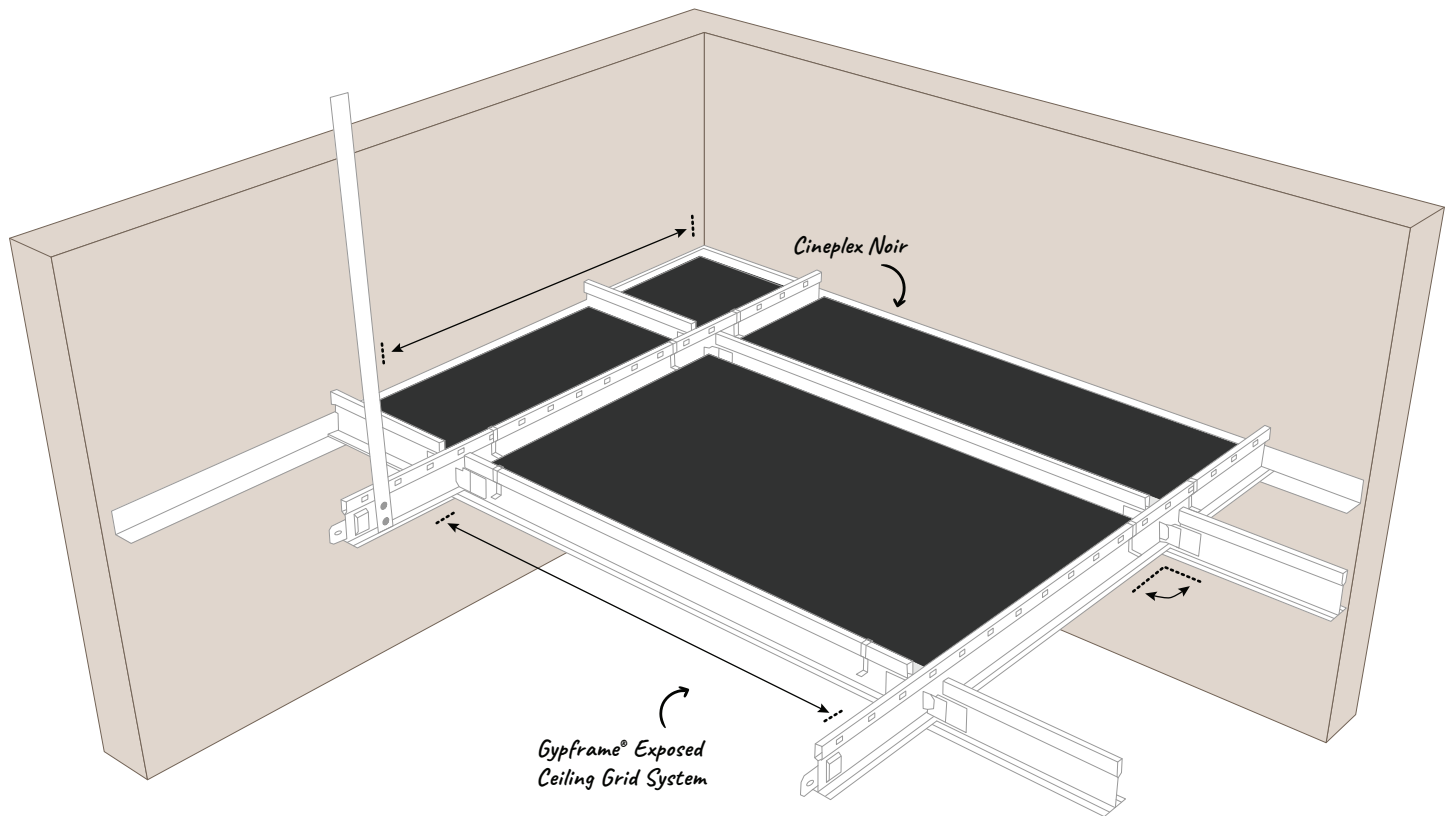

Tools Needed for Installation

- Standard grid system (with supplied hold-down clips)
- Sharp knife/blade for trimming or sizing

Architectural Specification

Install **Cineplex Noir acoustic ceiling** tiles (40 mm or 25 mm) with T-sections, hangers, and hold-down clips as per manufacturer's details and specifications.

Installation Instructions & Precautions

- 1 Install in a suspended ceiling grid system; secure with hold-down clips if specified by the architect.
- 2 Keep tile facings clean and free from dust, marks, or damage during handling and installation.
- 3 Do not install damaged tiles. Take care during subsequent ceiling work (e.g., light fitting installations).
- 4 Fixtures (lights, fans, etc.) must be independently secured and not rest on the tile.
- 5 Ensure grid layout follows manufacturer's specifications.

Handling & Storage

- Store under cover in dry conditions
- Handle carefully, especially edges and corners
- Do not stand, sit, or apply heavy pressure on tiles



Scan the QR

For more information scan the QR code