



Expanded Polystyrene

EPS: Insulation for buildings, coldrooms, pipes and vessels

DESCRIPTION


Polystyrene is made by polymerising styrene, which is produced by combining benzene and ethylene. The polystyrene thus produced is one of the thermoplastic materials sometimes called linear polymers. These are materials that soften on the application of heat and harden as they cool.

The expanded foam (known as EPS) is produced as small beads containing a pentane blowing agent which is expanded by treatment with steam to form pre-foam of the required density. The pre-foam is then fed into moulds and more heat (steam) is applied. This heat fuses the beads together to produce items in a variety of shapes and sizes or to make blocks for cutting into sheets and other products.

Sagex has more than 50 years experience in the manufacture of EPS and introduced the product into the South African market.

QUALITY MANAGEMENT SYSTEM

Isover products are manufactured according to ISO 14001:2004.

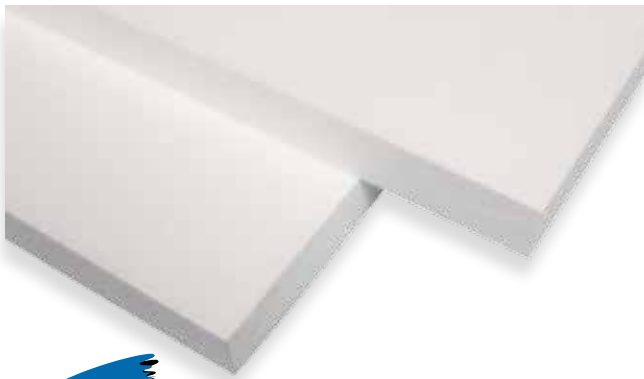

ENVIRONMENTAL SUSTAINABILITY

The Springs EPS facility is ISO 14001:2004 accredited. Less material, less energy and less emissions

- Zero ozone depleting potential (ODP)
- Zero global warming potential (GWP)

FEATURES & BENEFITS

- Resistant to vibration
- Low mass
- Thermally efficient
- Recyclable
- CFC and HCFC free, physiologically and chemically harmless
- Resistant to aging, mildew, bacteria and rot
- Easily cut and worked (fine toothed saw and conventional hand tools)
- Easily bonded - ensure adhesive is compatible with EPS
- Easily painted using high quality acrylic PVA applied by brush or spray

FIRE PROPERTIES

- Flame retardant EPS distinctly reduces the flammability and the spread of flame on the surface of foamed articles. This product is self-extinguishing as soon as the ignition source is removed
- Sagex FR grade (Styrene unfaced) has obtained a B/B1/2/H&V with and without sprinklers when tested in accordance with SANS 428

THERMAL PROPERTIES

Refer to physical properties table.





Expanded Polystyrene

DURABILITY

- Odourless, inert and fully compatible with all standard building materials and components
- Resistant to fresh water, salt water, alcohol, weak and certain strong acids, weak and strong alkalis, resistant to most vegetable and animal oils
- EPS is vulnerable to ketones, esters, hydrocarbon chlorides, benzol, petrol, fuel and turpentine ether
- Will not promote corrosion of steel, copper or aluminium
- Will not sustain vermin
- Will not breed or promote fungi, mould or bacteria
- Rot proof

ACOUSTIC PROPERTIES

EPS is not known as a good sound absorbing product due to its closed cell structure and low density. Isover offers a range of alternative acoustical insulation products if required.

APPLICATIONS

Sagex EPS has a 50 year proven track record as a cost competitive insulation material with application in a wide range of industries. Excellent thermal properties, lightweight and other user-friendly features combine to provide almost infinite product potential.

PHYSICAL PROPERTIES

Properties	15 D	20 D	30 D
Density (kg/m ³) - tolerance +/- 10%	15	20	30
Thermal conductivity at 10 °C (W/m.K) (mean temperature)	0.038	0.035	0.033
Compressive strength (kPa) - @ 10% deformation	70	110	200
Tensile strength (kPa)	200	280	440
Water absorption % volume	0.5 - 1.5	0.5 - 1.5	0.5 - 1.5
Temperature limits	-110 °C to 70 °C		

Typical values

* For design purpose only.

TOOLS NEEDED FOR INSTALLATION

Basic carpentry tools needed.

INSTALLATION INSTRUCTIONS

Note: Adhesives/paint must be compatible with EPS.
Refer to our technical solution centre.

HANDLING & STORAGE

As per all items in storage, fire safety regulations should always be considered. All health and safety regulations should be adhered to and complied with. Product should always be stored under cover and protected from the elements.

ENVIRONMENTAL

- CFC and HCFC free
- Recyclable
- Does not decompose into harmful substances

Isover reserves the right to alter or amend product specification without notice. The information given in this publication is correct to the best of our knowledge at the time of publication. Whilst Isover will endeavour to ensure publications are up to date, it is the users' responsibility to check with us that it is correct prior to use.

